

## Inverted Flared Fittings

### Advantages

Built to resist mechanical pullout. This economical fitting can be assembled and disassembled repeatedly. Readily available in a broad selection of styles to fill your specific needs. Manufactured from CA 360 or CA 345 brass.

### Specifications

Listed with Underwriter's Laboratories for flammable liquid and gas. Meets functional requirements of SAE, J512, ASA, ASME and MS (Military Standards). Refer to list of UL listed fittings on page 6 for specific configurations.

### Applications

Use with copper, brass, aluminum and welded steel hydraulic tubing that can be flared. Manufactured especially for hard-to-hold liquids and gases.

### Working Pressure Ranges

Temperature and type of tubing used are important factors. However, the following table is a good guide for proper selection. Temperature 73°F with copper tubing:

PSI	TUBE O.D. (IN.)	TUBE WALL (IN.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035

### Temperature Ranges

From -65° to +250°F.

### Vibration

Will withstand minimal vibration movements.

### Assembly Instructions

1. Cut tubing squarely and clean tube end thoroughly to remove burrs.
2. Place nut onto tube. Place threaded end of nut toward end of tube.
3. On thin wall copper, welded or brazed tubing, use double flare to prevent pinch-off or cracked flares.
4. Clamp tube flare between nut and flare seat of body by screwing nut on finger-tight. Tighten with a wrench an additional 1/4 turn for a metal-to-metal seal.

Note: The seat dimensions are predicated on practical threading limitations and use of these fittings with double flared tubing.

### Order

By part number and name. Bodies and nuts are separate items and individual part numbers must be indicated when ordered.

### Nomenclature

Part numbers are constructed from symbols that identify the style and size of the fitting. The first series of numbers and letters identifies the style and type fitting. The second series of numbers describes the size.

#### Example:

48 IF IFHD -4 -2  
 Half Union ————  
 Inverted Flared (Light Duty) ————  
 Inverted Flared (Heavy Duty) ————  
 1/4" (4/16) tube O.D. ————  
 1/8" (2/16) pipe thread ————

### Sizes

Tube sizes are determined by the numbers of sixteenths of an inch in the tube O.D.

### Special Fittings

Fitting configurations and/or sizes other than those shown in the catalog can be furnished. It is suggested that a print or sketch be submitted with the inquiry. Special UL stamped fittings are available. Please consult price list.


### Pricing

Only items priced in current supplementary price list PL3501 are carried in stock. Price and delivery for non-stock items furnished on request for specified quantity.

**Nut 41IF**

Ref. SAE 040110


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IF-2	1/8	5/16-28	5/16	.52	.133
41IF-3	3/16	3/8-24	3/8	.56	.197
41IF-4	1/4	7/16-24	7/16	.56	.259
41IF-5	5/16	1/2-20	1/2	.62	.321
41IF-6	3/8	5/8-18	5/8	.66	.384
41IF-8	1/2	3/4-18	3/4	.74	.508

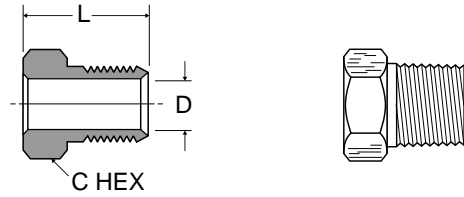

**Steel nut-zinc chromate 41IFS**


Ref. SAE 040110

PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IFS-3	3/16	3/8-24	3/8	.56	.196
41IFS-4	1/4	7/16-24	7/16	.56	.259
41IFS-5	5/16	1/2-20	1/2	.62	.321
41IFS-6	3/8	5/8-18	5/8	.66	.384
41IFS-8	1/2	3/4-18	3/4	.74	.508
41IFS-10	5/8	7/8-18	7/8	.80	.633
41IFS-12	3/4	1-1/16-16	1-1/16	.88	.759
41IFS-14	7/8	1-3/16-16	1-3/16	1.06	.890

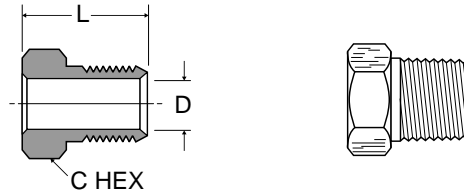

**Piloted Nut 41IFF For Single Flared Tubing**


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
41IFF-2	1/8	5/16-28	5/16	.52	.133
41IFF-3	3/16	3/8-24	3/8	.56	.197
41IFF-4	1/4	7/16-24	7/16	.56	.259
41IFF-5	5/16	1/2-20	1/2	.62	.321
41IFF-6	3/8	5/8-18	5/8	.66	.384
41IFF-8	1/2	3/4-18	3/4	.74	.508

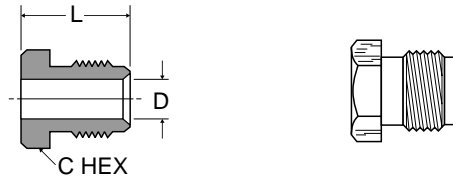

**Union 42IFHD**

Ref. SAE 040101


PART NO.	TUBE SIZE	STRAIGHT THREAD	C HEX	L	D
42IFHD-2	1/8	5/16-28	13/32	.60	.078
42IFHD-3	3/16	3/8-24	15/32	.65	.125
42IFHD-4	1/4	7/16-24	17/32	.63	.189
42IFHD-5	5/16	1/2-20	19/32	.71	.220
42IFHD-6	3/8	5/8-18	3/4	.81	.283
42IFHD-8	1/2	3/4-18	29/32	.92	.408

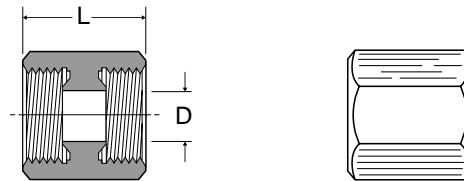

**Female connector 46IFHD**

Ref. SAE 040103

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
46IFHD-3-2	3/16	1/8	3/8-24	1/2	.76	.125
46IFHD-4-2	1/4	1/8	7/16-24	17/32	.76	.189
46IFHD-5-2	5/16	1/8	1/2-20	19/32	.79	.220
46IFHD-6-4	3/8	1/4	5/8-18	3/4	1.04	.283
46IFHD-8-6	1/2	3/8	3/4-18	29/32	1.10	.408

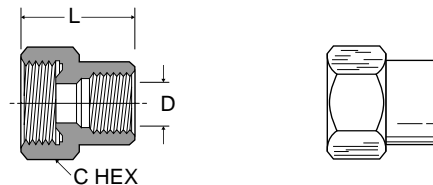


## Inverted Flared Fittings

### Male connector 48IFHD

Ref. SAE 040102


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
48IFHD-2-2	1/8	1/8	5/16-28	13/32	.63	.078
48IFHD-3-2	3/16	1/8	3/8-24	15/32	.70	.125
48IFHD-4-2	1/4	1/8	7/16-24	17/32	.74	.189
48IFHD-4-4	1/4	1/4	7/16-24	9/16	.89	.189
48IFHD-5-2	5/16	1/8	1/2-20	19/32	.79	.219
48IFHD-5-4	5/16	1/4	1/2-20	19/32	.98	.220
48IFHD-6-2	3/8	1/8	5/8-18	3/4	.89	.220
48IFHD-6-4	3/8	1/4	5/8-18	3/4	1.03	.283
48IFHD-6-6	3/8	3/8	5/8-18	3/4	1.03	.283
48IFHD-8-4	1/2	1/4	3/4-18	29/32	1.07	.346
48IFHD-8-6	1/2	3/8	3/4-18	29/32	1.07	.408
48IFHD-8-8	1/2	1/2	3/4-18	29/32	1.26	.408
48IFHD-10-8	5/8	1/2	7/8-18	1-1/16	1.32	.533
48IFHD-12-12	3/4	3/4	1-1/16-16	1 1/4	1.38	.625
48IFHD-14-12	7/8	3/4	1-3/16-16	1 5/16	1.30	.750

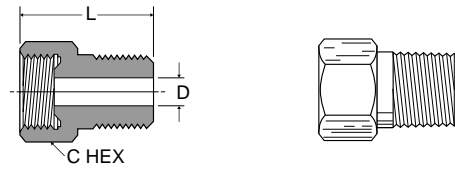

### Union tee 244IFHD

Ref. SAE 040401


PART NO.	TUBE SIZE	STRAIGHT THREAD	L	M	N	FLOW DIA. D
244IFHD-3	3/16	3/8-24	1.10	.55	.39	.125
244IFHD-4	1/4	7/16-24	1.13	.56	.42	.189
244IFHD-5	5/16	1/2-20	1.26	.63	.45	.220
244IFHD-6	3/8	5/8-18	1.48	.74	.56	.283
244IFHD-8	1/2	3/4-18	1.76	.88	.67	.408

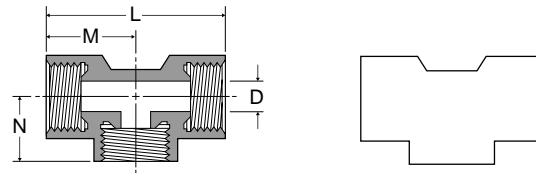

### Male branch tee 245IFHD

Ref. SAE 040425

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
245IFHD-4-2	1/4	1/8	7/16-24	.85	.43	.64	.189
245IFHD-6-4	3/8	1/4	5/8-18	1.17	.58	.94	.283

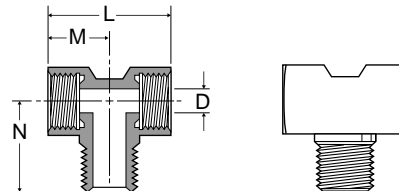


### Male elbow 249IFHD-249IF

Ref. SAE 040202

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
249IFHD-2-2	1/8	1/8	5/16-28	.79	.25	.58	.078
249IFHD-3-2	3/16	1/8	3/8-24	.85	.27	.61	.125
249IFHD-4-2	1/4	1/8	7/16-24	.92	.33	.65	.189
249IFHD-4-4	1/4	1/4	7/16-24	1.10	.27	.83	.189
249IFHD-5-2	5/16	1/8	1/2-20	.98	.47	.68	.219
249IFHD-5-4	5/16	1/4	1/2-20	1.16	.46	.86	.220
249IFHD-6-2	3/8	1/8	5/8-18	1.13	.53	.76	.220
249IF-6-4†	3/8	1/4	5/8-18	1.26	.45	.92	.281
249IFHD-6-4	3/8	1/4	5/8-18	1.32	.53	.95	.283
249IFHD-6-6	3/8	3/8	5/8-18	1.32	.50	.94	.283
249IFHD-8-4	1/2	1/4	3/4-18	1.48	.59	1.02	.408
249IF-8-6+	1/2	3/8	3/4-18	1.42	.53	.99	.406
249IFHD-8-6	1/2	3/8	3/4-18	1.48	.59	1.02	.408
249IFHD-8-8	1/2	1/2	3/4-18	1.67	.66	1.22	.408
249IFHD-10-6	5/8	3/8	7/8-18	1.62	.67	1.09	.533
249IFHD-10-8	5/8	1/2	7/8-18	1.82	.67	1.29	.533
249IFHD-14-12	7/8	3/4	1-3/16-16	2.12	.91	1.44	.750


†Light Duty Series

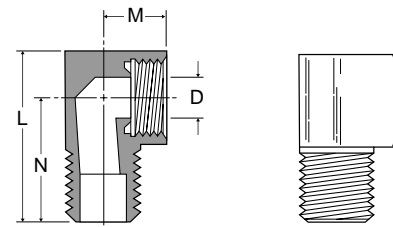

**Female elbow 250IFHD**

Ref. SAE 040203


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	N	FLOW DIA. D
250IFHD-3-2	3/16	1/8	3/8-24	.50	.49	.125
250IFHD-4-2	1/4	1/8	7/16-24	.53	.53	.189
250IFHD-5-2	5/16	1/8	1/2-20	.59	.59	.220
250IFHD-6-4	3/8	1/4	5/8-18	.67	.68	.283

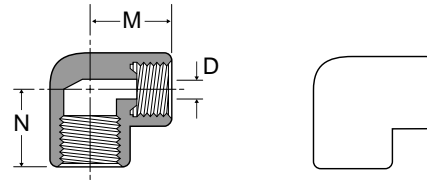

**Male run tee 251IFHD**

Ref. SAE 040424


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	M	M1	N	FLOW DIA. D
251IFHD-3-2	3/16	1/8	3/8-24	.39	.53	.72	.125
251IFHD-5-2	5/16	1/8	1/2-20	.45	.62	.85	.220
251IFHD-6-4	3/8	1/4	5/8-18	.56	.75	1.08	.283

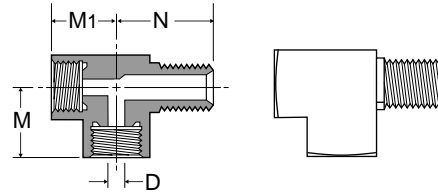

**Female branch tee 252IFHD**

Ref. SAE 040427


PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	L	M	N	FLOW DIA. D
252IFHD-5-2	5/16	1/8	1/2-20	1.26	.63	.45	.220
252IFHD-6-4	3/8	1/4	5/8-18	1.48	.74	.56	.283

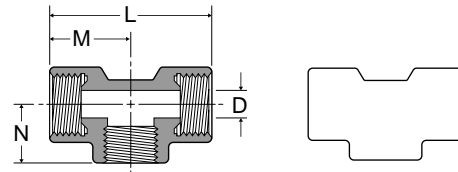

**Union elbow 255IFHD**

Ref. SAE 040201

PART NO.	TUBE SIZE	STRAIGHT THREAD	M	FLOW DIA. D
255IFHD-4	1/4	7/16-24	.55	.189

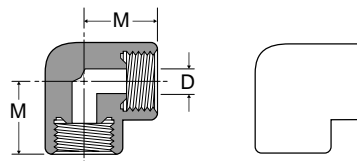

**45° elbow 259IFHD**

Ref. SAE 040302

PART NO.	TUBE SIZE	PIPE THREAD	STRAIGHT THREAD	C HEX	L	FLOW DIA. D
259IFHD-3-2	3/16	1/8	3/8-24	17/32	.88	.125
259IFHD-4-2	1/4	1/8	7/16-24	9/16	.94	.187
259IFHD-5-2	5/16	1/8	1/2-20	5/8	1.00	.220
259IFHD-5-4	5/16	1/4	1/2-20	5/8	1.16	.220
259IFHD-6-4	3/8	1/4	5/8-18	25/32	1.34	.283
259IFHD-8-6	1/2	3/8	3/4-18	7/8	1.44	.375
259IFHD-10-8	5/8	1/2	7/8-18	1-1/16	1.75	.533

